

Ref. : CC 6200.pas

Rev. : Initial

Date : 03/05/2007

Page : 1/1

FOOT CHECK VALVES WITH STRAINER

CC 6200



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES
INDUSTRIAL VALVES AND ACCESSORIES

APPLICATION

General uses : distribution and treatment of water (filtration, equipment of swimming pool) air conditioning, hydrocarbon, irrigation, etc.


GENERAL CHARACTERISTICS

Range : from DN 50 to DN 1000.
Mounting and working position in horizontal and vertical ascending fluid.
Short length.
Easy mounting.
Low weight.
Seat inside body.
Low head loss.
Seat : rubber/metal.




CONSTRUCTION

7	2	Screw	Stainless steel A2	
6	4	Screw	Stainless steel A2	
5	4	Washer	Stainless steel A2	
4	1	Strainer	Stainless steel 304 L	DIN: X5CrNi 18 10 ASTM: A 182 AISI 304 BS: 1449-2 304 S15
3	1	O-Ring	Nitril	
2	1	Disc	Stainless steel 304 L	DIN: X5CrNi 18 10 ASTM: A 182 AISI 304 BS: 1449-2 304 S15
1	1	Body	Stainless steel X5CrNi 17-12-2	DIN: X5CrNiMo18 10 ASTM: A182 AISI 316 BS: 970 316 S16
Pos.	Qty.	Description	Material	

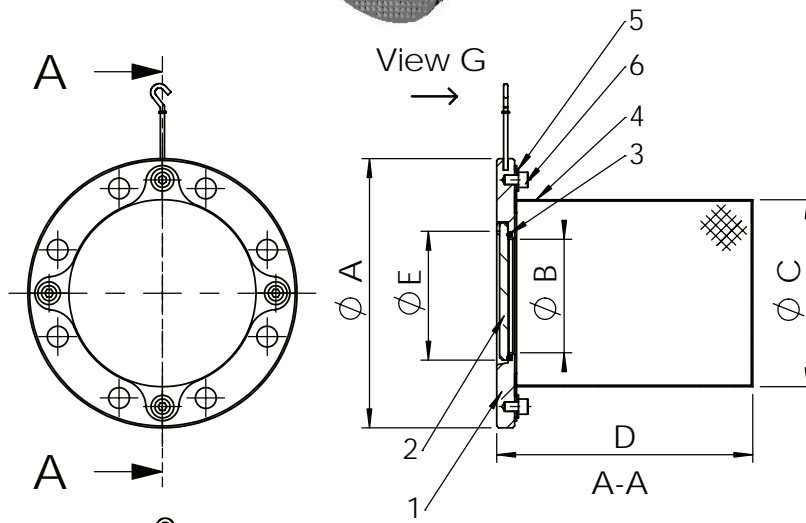

DIMENSIONS

DN		Ø A	Ø B	Ø C	D	Drilled steel sheet
mm	Inch					
50	2"	165	32	102	100	R 6 T 8.5
65	2 1/2"	185	45	122	120	
80	3"	200	56	133	140	
100	4"	220	75	158	170	
125	5"	250	95	184	210	
150	6"	285	120	212	235	R 10 T 15
200	8"	340	160	268	270	
250	10"	395	200	320	370	
300	12"	445	240	370	400	
350	14"	505	280	430	420	
400	16"	565	316	470	450	
450	18"	615	365	500	500	
500	20"	670	410	540	570	
600	24"	780	490	640	680	
700	28"	895	595	750	850	
800	32"	1015	690	860	950	
900	36"	1115	715	955	1080	
1000	40"	1230	825	1055	1200	

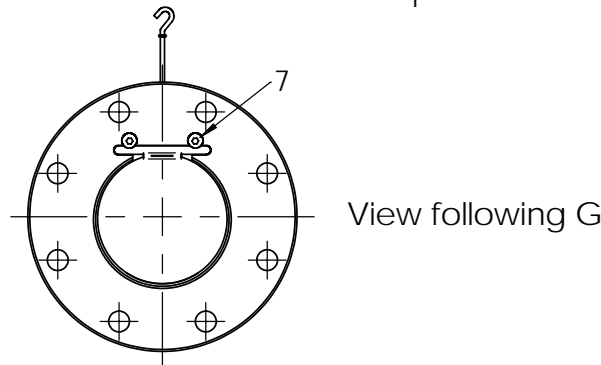


WORKING CONDITIONS

Maximum working pressure : 16 bar.
Maximum temperature : + 80 °C.

Pressure test according to standards
EN 12266-1, DIN 3230, BS 6755 and ISO 5208 :
Body : 24 bar.
Seat : 17,6 bar.

STANDARDS

Connections according to standard EN 1092-1.

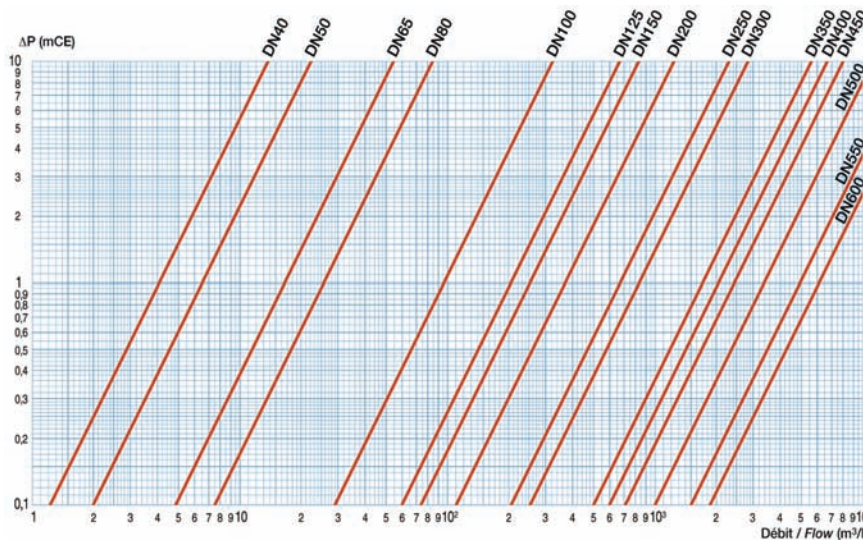

5, impasse Pascal - Z.I. - BP 177 - 69686 CHASSIEU Cedex - FRANCE
Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
E-mail : tecofi@tecofi.fr - Service commercial / Sales dep. : sales@tecofi.fr - www.tecofi.fr