

Ref. : VG 3400-03.pas

Rev. : Initial

Date : 11/06/07

Page : 1/1

KNIFE GATE VALVE WITH DOUBLE ACTING PNEUMATIC ACTUATOR

VG 3400-03



ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES
INDUSTRIAL VALVES AND ACCESSORIES

APPLICATION

General use : Pulp production, water, water treatment, waste water, chemical industry (powdery or crystallizing products), wine-producing, pulverized products (cement work, pneumatic transport, stocking).

GENERAL CHARACTERISTICS

Function ON/OFF or regulation.
Wafer threaded mounting ISO PN10.
Unidirectional tightness, direction indication thanks to the arrow on the body.
Small retention zone: the gate is guided in the body and has little clearance.
Gland assembly: packing and O-ring (same material as seat joint) to assure the elasticity and decrease the operating torque.
Small head loss.
Possibility to regulate thick fluids the adaptation of a diaphragm ring .



Standard tightness



Tightness metal/metal



CONSTRUCTION

10	1	O-ring	Nitril	
9	1	Support ring	Stainless steel 316	DIN : X5CrNiMo18 10 ASTM : A 182 AISI 316 BS : 316 S16
8	1	Gasket	Nitril	
7	1	Packing gland	Aluminium	
6	1	Pneumatic actuator	Aluminium	
5*	2	Support plate	Steel + epoxy	
4	1	Stem	Stainless steel 13%Cr	
3	1	Knife gate	X5 Cr Ni 18-10	DIN : X5CrNi 18-10 ASTM : AISI 304 BS : 304 S15
2	2	Packing	Tallowed cotton	
1	1	Body	EN-GJL-250	DIN : GG 25 ASTM : A48 class 40B BS : 1452 Grade 250
Pos.	Qty.	Description	Material	

* Pre-shaped parts up to DN 300.

DIMENSIONS

DN		A	B	C	D	Ø F	Ø P	H	Ø K	n	Ø M	Weight (kg)
mm	inch											
50	2"	40	240	124	83	1/4"	80	412	125	4	4-M16	8
65	2 1/2"	40	265	139	83	1/4"	80	458	145	4	4-M16	9
80	3"	50	290	154	83	1/4"	80	502	160	8	4-M16	10
100	4"	50	335	174	83	1/4"	100	562	180	8	4-M16	13
125	5"	50	373	189	93	1/4"	125	642	210	8	4-M16	18
150	6"	60	424	220	93	1/4"	125	718	240	8	4-M20	23
200	8"	60	533	275	108	1/4"	160	882	295	8	4-M20	39
250	10"	70	625	326	108	1/4"	200	1044	350	12	8-M20	57
300	12"	70	732	380	108	1/4"	200	1164	400	12	8-M20	74
350	14"	96	835	438	290	3/8"	250	1362	460	16	10-M20	127
400	16"	100	945	494	290	3/8"	250	1542	515	16	10-M24	138
450	18"	106	1040	547	290	1/2"	250	1677	565	20	14-M24	176
500	20"	110	1150	613	290	1/2"	300	1842	620	20	14-M24	209
600	24"	110	1354	716	290	1/2"	300	2147	725	20	14-M27	250
700	28"	110	1540	835	400	1/2"	350	2542	840	24	16-M27	410
800	32"	110	1750	972	400	1/2"	400	2852	950	24	16-M30	562
900	36"	110	1990	1041	400	1/2"	400	3174	1050	28	20-M30	701
1000	40"	120	2195	1152	450	1/2"	400	3400	1160	28	20-M33	980
1200	48"	120	2390	1255	450	1/2"	400	3880	1380	32	22-M36	1450

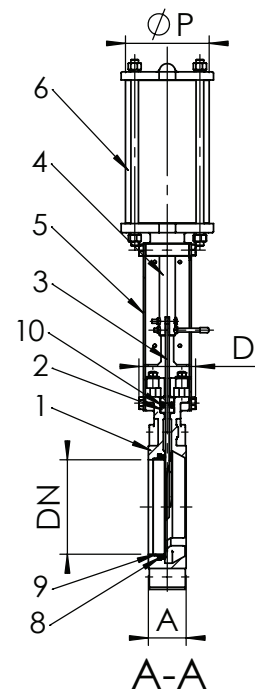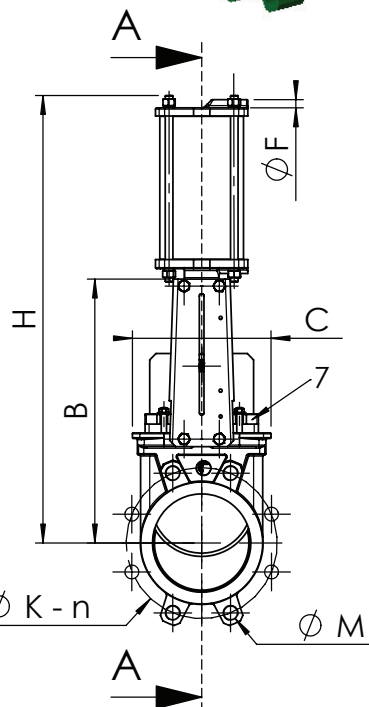

WORKING CONDITIONS

Maximum working pressure : DN 50-250 : 10 bar
 DN 300-450 : 7 bar
 DN 500-600 : 4 bar
 DN 700-900 : 2 bar
 DN 1000-1200 : 1 bar

Maximum temperature : -10°C / +80°C

STANDARDS

Manufacture according to the requirements of the European directive 97/23/CE «Equipments under pressure» : fluids category III modulate H.

Test procedures are established according to standard EN 12266-1, DIN 3230, BS 5154 and ISO 5208.

Connections according to standard EN 1092-2 and DIN 2501 : ISO PN10.

5, impasse Pascal - Z.I. - BP 177 - 69686 CHASSIEU Cedex - FRANCE
 Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
 E-mail : tecofi@tecofi.fr - Service commercial / Sales dep. : sales@tecofi.fr - www.tecofi.fr