

Ref. : VG 6400-00.pas

Rev. : A

Date : 16/04/08

Page : 1/1

# KNIFE GATE VALVE WITH HANDWHEEL

## VG 6400-00




ROBINETTERIE INDUSTRIELLE ET ACCESSOIRES  
INDUSTRIAL VALVES AND ACCESSORIES

### APPLICATION

General use : Pulp production, water, water treatment, waste water, chemical industry (powdery or crystallizing products), wine-producing, pulverized products (cement work, pneumatic transport, stocking).

### GENERAL CHARACTERISTICS

Range : from DN 50 up to DN 600.  
Function ON/OFF or regulation.  
Wafer threaded mounting ISO PN10.  
Unidirectional tightness, direction indication thanks to the arrow on the body.  
Small retention zone: the gate is guided in the body and has little clearance.  
Gland assembly: packing and O-ring (same material as seat joint) to assure the elasticity and decrease the operating torque.  
Small head loss.  
Possibility to regulate thick fluids the adaptation of a diaphragm ring .

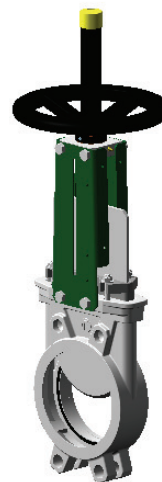


Standard tightness



Metal-metal tightness

### CONSTRUCTION

17	1	O-Ring	EPDM	
16**	1	Support ring	Stainless steel 316	DIN : X5CrNiMo18 10 ASTM : A 182 AISI 316 BS : 316 S16
15**	1	Gasket	EPDM	
14	1	Packing gland	Stainless steel CF8M	DIN : G-X6CrNiMo18 10 ASTM : A 351 grade CF8M BS : 316 C16
13	1	Handwheel	Cast iron EN-GJL-250	DIN : GG25 ASTM : A 48 class 40B BS : 1452 grade 250
12	1	Protection tube	Steel	
11	1	Cap	Plastic	
10	1	Greaser	Stainless steel	
9	1	Stop screw	Stainless steel	
8	1	Nut support	Bronze	
7	1	Friction washer	Bronze	
6	1	Nut support	Zinc steel	
5*	2	Support plate	Steel + epoxy	
4	1	Stem	Stainless steel 13%Cr	
3	1	Gate	Stainless steel X5CrNiMo 17-12-2	DIN : X5CrNiMo18 10 ASTM : A 182 AISI 316 BS : 1449-2 316 S16
2	2	Packing	Tallowed cotton	
1	1	Body	Stainless steel GX5CrNiMo 19-11-2	DIN : G-X6CrNiMo18 10 ASTM : A 351 grade CF8M BS : 316 C16
Pos.	Qty.	Description	Material	

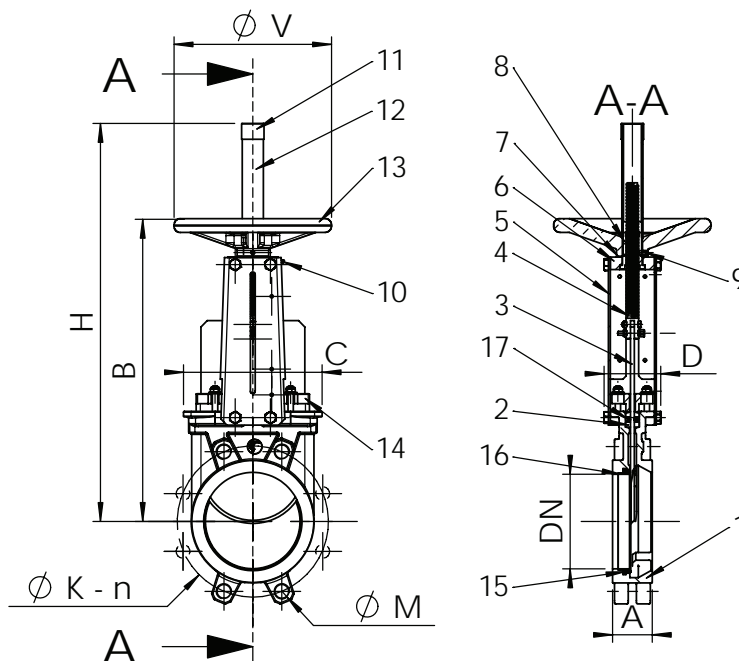

### DIMENSIONS

DN		A	B	C	D	ØV	H	ØK	n	ØM	Weight (kg)
mm	inch										
50	2"	40	283	124	83	200	348	125	4	4 x M16	7,5
65	2 1/2"	40	308	139	83	200	388	145	4	4 x M16	9,0
80	3"	50	333	154	83	200	413	160	8	4 x M16	10,5
100	4"	50	378	174	83	200	488	180	8	4 x M16	12,0
125	5"	50	423	189	93	250	564	210	8	4 x M16	16,0
150	6"	60	474	220	93	250	635	240	8	4 x M20	19,5
200	8"	60	593	275	108	310	809	295	8	4 x M20	33,0
250	10"	70	685	326	108	310	946	350	12	8 x M20	46,0
300	12"	70	792	380	108	310	1118	400	12	8 x M20	62,0
350	14"	96	900	438	290	500	1282	460	16	10 x M20	116,0
400	16"	100	978	494	290	500	1441	515	16	10 x M24	148,0
450	18"	106	1105	547	290	500	1587	565	20	14 x M24	185,0
500	20"	110	1215	613	290	500	1809	620	20	14 x M24	203,0
600	24"	110	1418	716	290	500	2060	725	20	14 x M27	290,0

### WORKING CONDITIONS

Maximum working pressure : DN 50-250 : 10 bar  
DN 300-450 : 7 bar  
DN 500-600 : 4 bar

Maximum temperature : +4°C / +110°C (standard tightness).  
Maximum temperature : +4°C / +200°C (metal-metal tightness).

### STANDARDS

Manufacture according to the requirements of the European directive 97/23/CE «Equipments under pressure» : fluids category III modulate H.  
On request : Product in accordance to european directive "Potentially explosive atmospheres" N° 94/9/EC: ATEX II 2 GD c and ATEX II 3 GD c.  
Test procedures are established according to standard EN 12266-1, DIN 3230, BS 5154 and ISO 5208  
Connections according to standard EN 1092-2 and DIN 2501 : ISO PN10.

\* Pre-shaped parts up to DN 300.

\*\* Missing parts on metal / metal tightness